


**NOTES:**  
 ① IF SPACING DIM. IS 3/8 (9.52) INSTEAD OF 1/4(6.35) AS SHOWN, SWITCH PLATES AND DRILL & C'SINK. TO SUIT.


**ACTIVE SIDE ROUTING** **INACTIVE SIDE ROUTING**  
 FOR PLATE #30-886 FOR PLATE #30-884

PACKAGE NO. 30-894

**1095 WOOD APPLICATION**  
 ROUTING OF WOOD DOOR FOR  
 SUPPORT PLATES

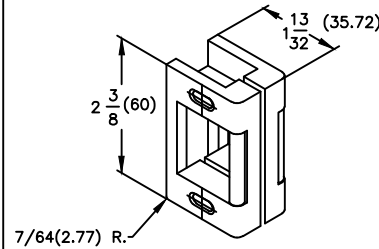

**TYPE "P" ADJUSTABLE STRIKE**

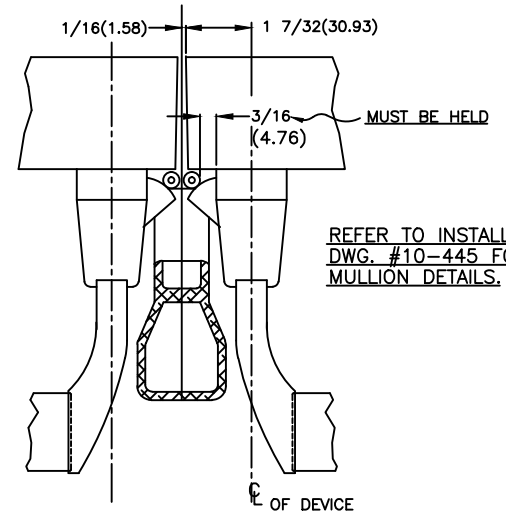

REFER TO INSTALLATION  
 DWG. #10-445 FOR  
 MULLION DETAILS.

**L.H.R.B. SHOWN**  
**R.H.R.B. OPPOSITE**

F 3/14/98 R E D R A W N		ECN1143		RM
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED DECIMAL DIMENSIONS .XX ± .010 DECIMAL DIMENSIONS .XXX ± .005 ANGULAR ± ° FRACTIONAL ± 1/64		APPROVALS	DATE	
		APPROVED		
		CHECKED		
		DRAWN	RM	7/7/97
MATERIAL		SCALE	NONE	
FINISH		1095 xWOOD APPLICATION		SHEET 1 OF 1 SHEETS
HEAT TREAT				DWG. NO.
				REV.
		10-482		F

**jackson**  
 CORPORATION  
 3447 UNION PACIFIC AVE.  
 LOS ANGELES, CALIF. 90023